


Figured dimensions only are to be taken from this drawing.
All dimensions are to be checked on site before any work is put in hand. IF IN DOUBT ASK.

CDM:
Hazard Elimination & Risk Reduction has been undertaken and recorded where appropriate, in accordance with the requirements of "The Construction (Design and Management) Regulations 2015" and the associated "Industry Guidance for Designers"


Activity Spaces

Bathroom
Sink – 700 x 800mm
WC – 1100 x 800mm (400mm from wall)
Bath – 1200 x 800mm
Shower – 800 x 800mm

Bedroom
Bed
- Minimum size = 900 x 2000mm
- Activity space = 400mm at side/ 250mm at bottom
Wardrobe
- Minimum size = 600 x 600mm
- Activity space = 1000mm in front of wardrobe
**Build in wardrobe can be provided of equal size*
Drawers
- Minimum size = 750 x 450mm
- Activity space = 1000mm in front of drawers
Kitchen
- 1.5 x 1.5m maneuvering space
- 1m activity space in front of oven
**Storage space of 1m³ minimum*

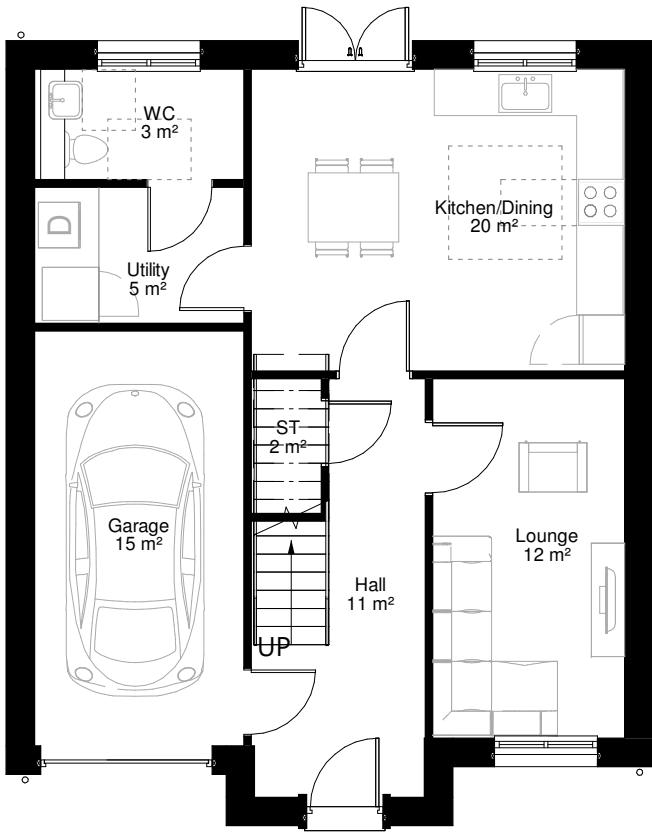

Level 00
Scale - 1 : 100

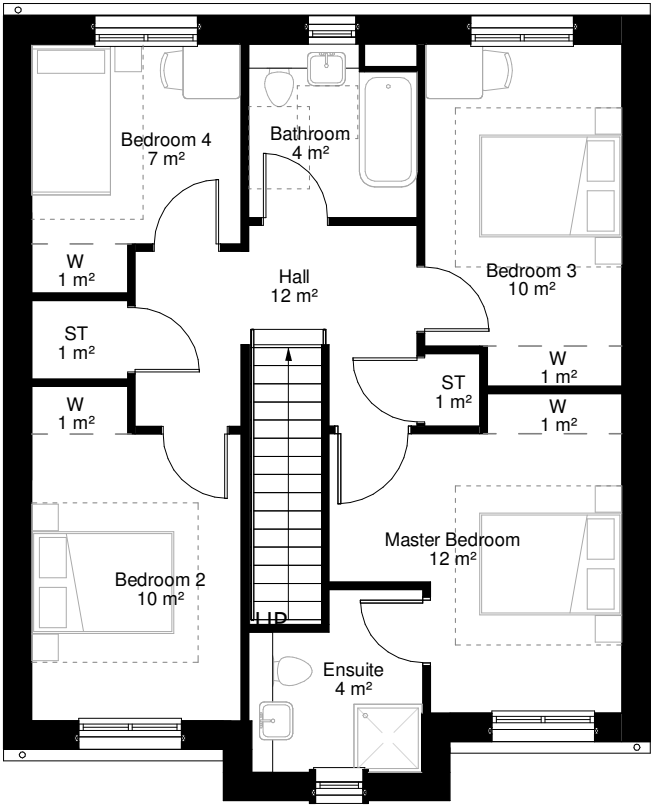

Level 01
Scale - 1 : 100

Rev	Description	Dr'n	Chk'd	Date



219 Colinton Road
Edinburgh
EH14 1DJ
Tel: 0131 455 4616

www.seventhgreen.co.uk

Client
Taylor Wimpey

Project
West Craigs Park

Drawing
4 Bed Detached Floor Plan
Gold Standard

Project No.
BSV10100

Drawing No.
SVG-DRW-A-007

Status
For Information

Date 10/07/19 Scale As indicated @ A3